

YL30-M-2 30 watt mono-crystalline solar module

Typical Electrical Characteristics

Model	YL30D-18b
Power Tolerance	0/+5W
Max Power (Pmax) watts	30
Optimum Operating Voltage (Vmp) volts	18.4
Optimum Operating Current (Imp) amps	1.63
Open Circuit Voltage (Voc) volts	22.8
Short Circuit Current (Isc) amps	1.74
Module Efficiency (%)	13.1

Note: The specifications are obtained under Standard Test Conditions (STC): 1,000W/m², Am 1.5, Cell Temperature 25°C

Mechanical Characteristics

Solar Cell (mm)	Mono 156.75 x 31.2
No. of Cells	36 (4 x 9)
Dimensions L x W x H mm	510 x 450 x 25
Weight kg	2.58 approx
Junction Box	IP65
Connector	Screw terminal
Packaging	6 pcs / carton

Working Conditions


Maximum System Voltage	DC 120V (IEC)
Temperature Cycling Range	-40°C ~ +85°C
NOTC	46 ± 2°C
Maximum Series Fuse	10A
Application Class	Class A
Temperature Coefficients Voc	-0.37%/°C
Temperature Coefficients Vmpp	-0.45%/°C
Temperature Coefficients Isc	0.06%/°C
Temperature Coefficients Pmax	-0.4%/°C

Warranty

5 Year Repair and Workmanship Warranty

12 Year Warranty at 90% Power Output

25 Year Warranty at 80% Power Output

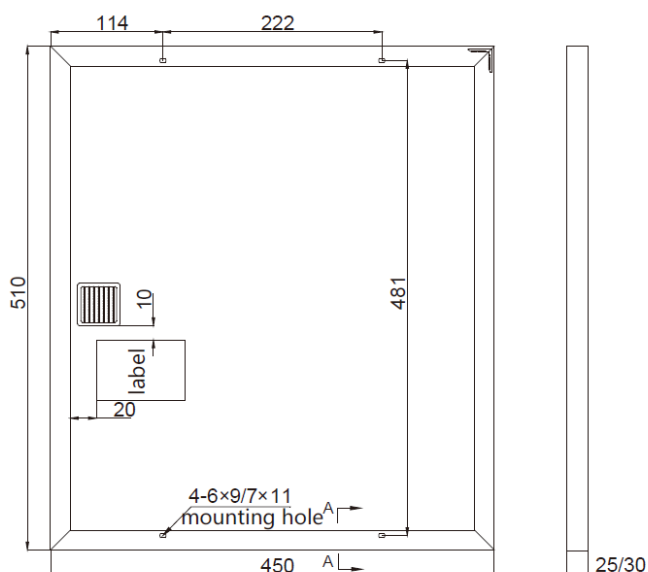

Read the Installation and User manuals before handling, installing and operating Yingli Solar modules



32e William Pickering Drive, Rosedale, AUCKLAND 0632
www.indepower.co.nz sales@indepower.co.nz